



**FEATURES**

- Patent protected
- UL62368-1 recognised
- ANSI/AAMI ES60601-1, 1 MOPP pending recognition
- 4.2kVDC isolation “Hi Pot Test”
- Automated manufacture
- Industry standard footprint
- Short circuit protection
- Manufactured in the UK
- Characterised CMTI >200kV/μS

**PRODUCT OVERVIEW**

The NXJ1T series is a new patented technology, industry standard footprint DC-DC converter. Manufactured in the UK incorporating proprietary block-coil transformer technology in a surface mount moulded package.

The NXJ1T provides high isolation, low leakage current, and exceptional temperature cycling performance in harsh industrial environments.

**SELECTION GUIDE**

Order Code <sup>1</sup>	Nominal Input Voltage	Output Voltage	Rated Input Current	Output Current	Load Regulation (Typ)	Load Regulation (Max)	Output Ripple & Noise (Typ)	Output Ripple & Noise (Max)	Efficiency (Min)	Efficiency (Typ)	Switching Frequency (Typ)	Isolation Capacitance	MTTF <sup>2</sup>	
	V	V	mA	mA	%	%	mVp-p	mVp-p	%	%	MHz	pF	MIL. kHrs	Tel. kHrs
<b>NXJ1S0505TMC</b>	5	5	250	200	24	35	5	20	71	76	1.5	2.5	2638	38962
<b>NXJ1S0505T6MC</b>	5	5	250	200	24	35	5	20	71	76	1.5	2.5	2638	38962
<b>NXJ1S0505PTMC</b>	5	5	250	200	24	35	5	20	71	76	1.5	2.5	2311	34632
<b>NXJ1S0505PT6MC</b>	5	5	250	200	24	35	5	20	71	76	1.5	2.5	2311	34632
<b>NXJ1S0515TMC</b>	5	15	250	67	17	25	10	20	73	78	1.5	2.5	2951	38021
<b>NXJ1S0515T6MC</b>	5	15	250	67	17	25	10	20	73	78	1.5	2.5	2951	38021
<b>NXJ1S0515PTMC</b>	5	15	250	67	17	25	10	20	73	78	1.5	2.5	2170	35406
<b>NXJ1S0515PT6MC</b>	5	15	250	67	17	25	10	20	73	78	1.5	2.5	2170	35406
<b>NXJ1S1205TMC</b>	12	5	110	200	23	33	10	20	70	74	1.5	2.5	2215	34938
<b>NXJ1S1205T6MC</b>	12	5	110	200	23	33	10	20	70	74	1.5	2.5	2215	34938
<b>NXJ1S1205PTMC</b>	12	5	110	200	23	33	10	20	70	74	1.5	2.5	1714	29650
<b>NXJ1S1205PT6MC</b>	12	5	110	200	23	33	10	20	70	74	1.5	2.5	1714	29650
<b>NXJ1S1215TMC</b>	12	15	110	67	17	26	10	20	71	75	1.5	2.5	2859	37763
<b>NXJ1S1215T6MC</b>	12	15	110	67	17	26	10	20	71	75	1.5	2.5	2859	37763
<b>NXJ1S1215PTMC</b>	12	15	110	67	17	26	10	20	71	75	1.5	2.5	2108	33165
<b>NXJ1S1215PT6MC</b>	12	15	110	67	17	26	10	20	71	75	1.5	2.5	2108	33165

**INPUT CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input type	4.5	5.0	5.5	V
	Continuous operation, 12V input type	10.8	12	13.2	
UVLO		3.3		3.9	V
Input reflected ripple current			10		mA p-p

**ISOLATION CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Production tested for 1 second	4200			VDC
	Qualification tested for 1 minute	4200			
Safety standard	UL62368-1	Reinforced	Creepage and clearance 4mm		200
		Basic		400	
	ANSI/AAMI ES60601-1 <sup>3</sup>	1 MOPP			250

**OUTPUT CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated power	T <sub>A</sub> =-40°C to 115°C			1.0	W
Voltage set point accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>		0.01	0.05	%/%

- Components are supplied in tape and reel packaging, please refer to package specification section. Orderable part numbers are NXJ1SXXXX(P)T(6)MC-R7 (230 pieces per reel), or NXJ1SXXXX(P)T(6)MC-R13 (930 pieces per reel).
- Calculated using MIL-HDBK-217 FN2 and Telcordia SR-332 calculation model with nominal input voltage at full load.
- ANSI/AAMI ES60601-1 recognition is currently pending.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to  
[www.murata.com/en-global/products/power/rohs](http://www.murata.com/en-global/products/power/rohs)



### TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	see derating curves	-40		125	°C
Storage		-40		125	
Product temperature rise above ambient	1 Layer PCB		20		
	4 Layer PCB		10		
Cooling	Free air convection				

### ABSOLUTE MAXIMUM RATINGS

Input voltage 5V <sub>IN</sub>		7V
Input voltage 12V <sub>IN</sub>		15V
Short Circuit protection <sup>1</sup>	NXJ1SXXXXPT(6)MC	Continuous
	NXJ1SXXXXT(6)MC	Momentary (5 seconds)

1. Momentary short circuit protection tested up to 100°C.

### TECHNICAL NOTES

#### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NXJ1T series of DC-DC converters are all 100% production tested at 4.2kVDC for 1 second and have been qualification tested at 4.2kVDC for 1 minute.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NXJ1T series has been recognised by Underwriters Laboratory to 200Vrms Reinforced Insulation and 400Vrms Basic insulation, please see safety approval section for more information.

#### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NXJ1T series has a proprietary block-coil transformer, While parts can be expected to withstand several times the stated test voltage, Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage should be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognised parts rated for better than functional isolation where the insulation is always supplemented by a further insulation system of physical spacing or barriers.

### SAFETY APPROVAL

#### ANSI/AAMI ES60601-1

The NXJ1T series is pending recognition by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOPP (Means Of Patient Protection) based upon a working voltage of 250 Vrms max, between input and output.

#### UL62368-1

The NXJ1T series has been recognised by Underwriters Laboratory (UL) to UL62368-1 for reinforced insulation to a working voltage of 200Vrms and for basic insulation to a working voltage of 400Vrms.

Creepage and clearance is 4mm.

#### FUSING

The NXJ1T Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

Input Voltage, 5V: T500mA

Input voltage 12V: T200mA

All fuses should be UL recognised and suitably rated to meet application requirements.

### RoHS COMPLIANCE AND MSL INFORMATION



This series is compatible with Pb-Free soldering systems and is also backward compatible with Sn/Pb soldering systems.

The NXJ1T series can be soldered in accordance with J-STD-020 and have a classification temperature of 245°C and moisture sensitivity level 2a. The termination finish on this product is ENIG with plating thickness 0.05 microns (min) as per IPC-4552.

For further information please visit [www.murata.com/en-global/products/power/rohs](http://www.murata.com/en-global/products/power/rohs)


**ENVIRONMENTAL VALIDATION TESTING**

The following tests have been conducted on this product series, as part of our design verification process. The datasheet characteristics specify user operating conditions for this series, please contact Murata if further information about the tests is required.

Test	Standard	Condition
Temperature cycling	JEDEC JESD22-A104	1000 cycles between two temperature extremes set to achieve -40°C and +125°C. 2 full cycles per hour.
Humidity bias	JEDEC JESD22-A101	1000 hours at 85°C ±2°C, 85 ± 5% RH with continuous bias
HAST (Unbiased)	JEDEC JESD22-A118	96 hours at 130°C ±2°C, 85% ± 5% R.H.
High temperature operating life (HTOL)	JEDEC JESD22-A108	1000 hours at 105 ±5°C.
High temperature Storage life	JEDEC JESD22-A103	1000 hours at 125°C (-0/+10)°C.
Low temperature Storage life	JEDEC JESD22-A119	1000 hours at -40°C (-10/+5)°C.
MSL	IPC/JEDEC J-STD-020	Bake samples at 125 +5/-0°C for 24 hours minimum before conditioning in the Temperature/Humidity chamber for 168 hours 60°C/60%RH.
Solderability	Based on IPC/ECA J-STD-002, Test B and B1	SnPb (Test B) For leaded solderability the parts are baked in an oven for 4 hours ±15 min. at a temperature of 155±5°C. Dipped in solder at 255°C ±5°C for 5 +0/-0.5 seconds. Pb-free (Test B1) For lead free solderability the parts are baked in an oven for 4 hours ±15 min. at a temperature of 155±5°C. Dipped in solder at 245°C ±5°C for 5 +0/-0.5 seconds.
Shock	JEDEC JESD22-B110	1500g (± 10%), 5 x 0.5ms (+/-15%) half sine pulses in each of 6 planes (± X, ± Y, ± Z) 30 pulses in total.
Vibration	JEDEC JESD22-B103	20Hz to 2 kHz to 20Hz (logarithmic variation) in >4 minutes, 4 times in each orientation (i.e. 12times), 20G (±10%) peak acceleration.
Aqueous wash	Internal reference standard	Aqueous / ultrasonic process in a suitable chemical for 30 minutes at a controlled temperature, using a water wash at low pressure with demineralised water wash at low pressure and Drying in a vacuum oven.
Resistance to cleaning agents	Internal reference standard	Step 1: Solvent washed – Novec 71IPA & Topklean EL-20A. Pulsed ultrasonic immersion Step 2: Parts rubbed with a cloth soaked with water for 15 seconds. Repeated 3 times Step 3: Tape applied across the parts printed side and then removed. Repeated 3 times Step 4: Parts rubbed with a cloth soaked with petroleum spirit for 15 seconds. Repeated 3 times.
Board flex	AEC-Q200-005	A 2mm (minimum) deflection is applied once for 60 (+5) seconds.
Terminal strength/Shear stress test/Shear stress test/Push test	AEC-Q200-006	17.7N force is applied to parts mounted on a PCB once for 60 (+1) seconds. Applied to separate samples in x and y axes.
ESD	ANSI/ESDA/JEDEC JS-001	HBM Testing Standard at 5 stress levels; 0.5kV, 1kV, 2kV, 4kV and 8kV.
	ANSI/ESDA/JEDEC JS-002	CDM Testing Standard at 5 stress levels; 125V, 250V, 500V, 750V and 1000V.

**PART NUMBER STRUCTURE**

**NXJ 1 S XX XX P T 6 M C - RXX**

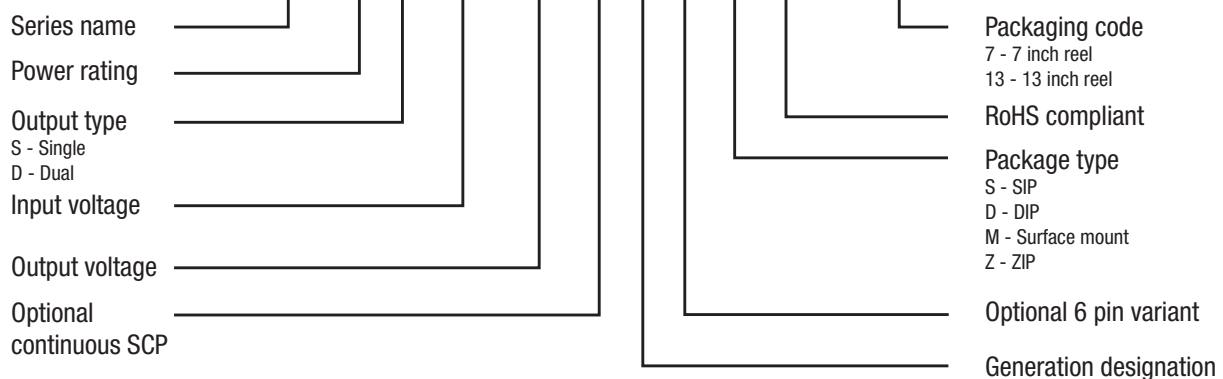

**CHARACTERISATION TEST METHODS**


**Ripple & Noise Characterisation Method**

Ripple and noise measurements are performed with the following test configuration.

C1	1 $\mu$ F X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10 $\mu$ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100m $\Omega$ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450 $\Omega$ resistor, carbon film, $\pm$ 1% tolerance
R2	50 $\Omega$ BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires

Measured values are multiplied by 10 to obtain the specified values.

**Differential Mode Noise Test Schematic**

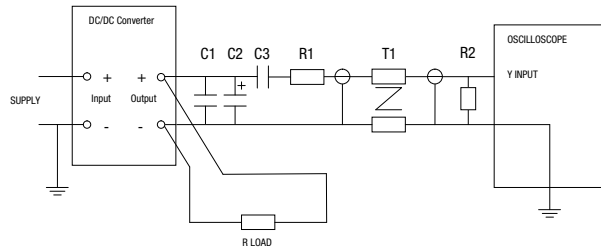

**APPLICATION NOTES**

**Minimum Load**


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise higher than the specified output voltage if the output load falls to less than 5%.

**Capacitive Loading & Start Up**

Typical start up times for this series, with a typical input voltage rise time of 3ms with resistive only load, and with added output capacitance of 10 $\mu$ F, are shown in the table below. The product series will start into capacitance up to 3300 $\mu$ F with increased start times

Part Number	Start-up time (mS)
NXJ1Sxx05(P)T(6)MC	3
NXJ1Sxx15(P)T(6)MC	6


Typical Start-Up Wave Form

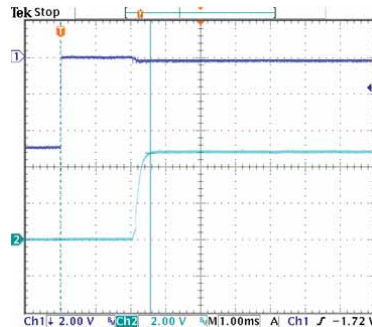


**TOLERANCE ENVELOPES**

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.


**NXJ1S0505(P)T(6)MC**

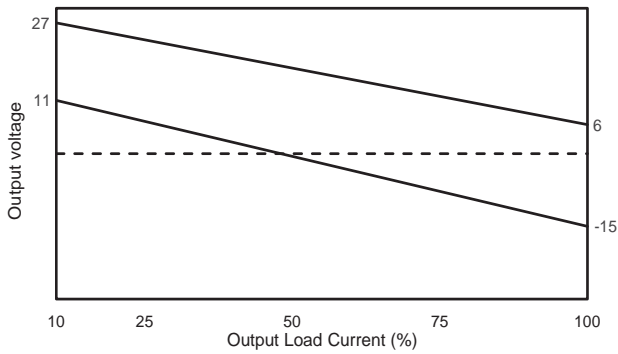


**NXJ1S0515(P)T(6)MC**

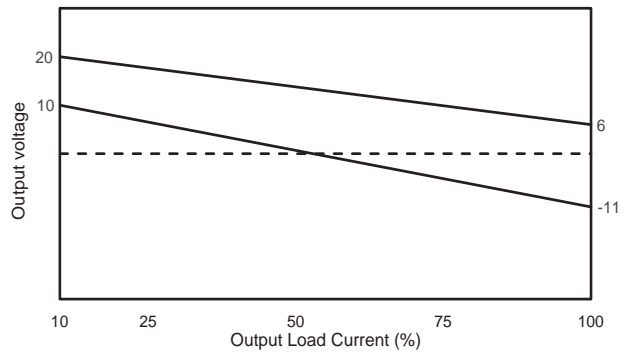

**NXJ1S1205(P)T(6)MC**

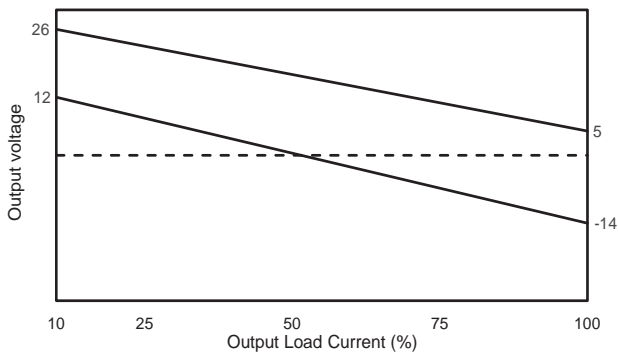


**NXJ1S1215(P)T(6)MC**

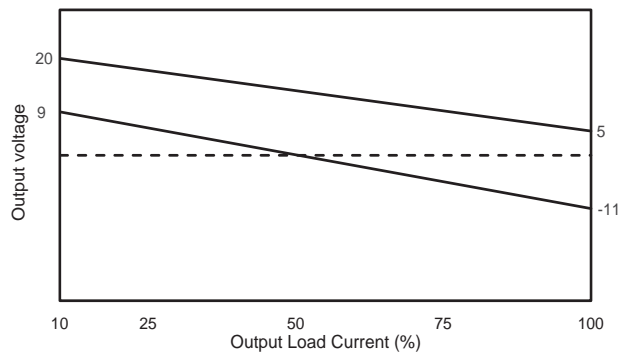


**EFFICIENCY VS LOAD**


**NXJ1S0505(P)T(6)MC**

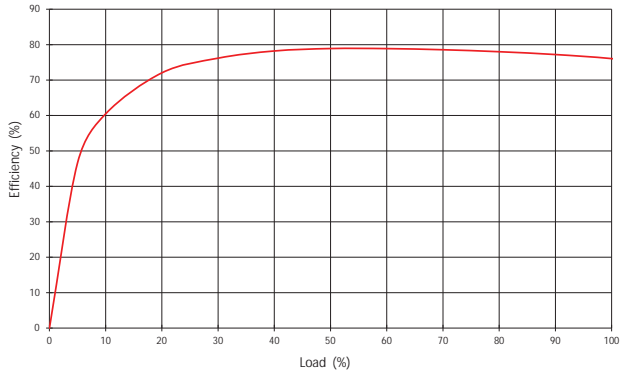


**NXJ1S0515(P)T(6)MC**

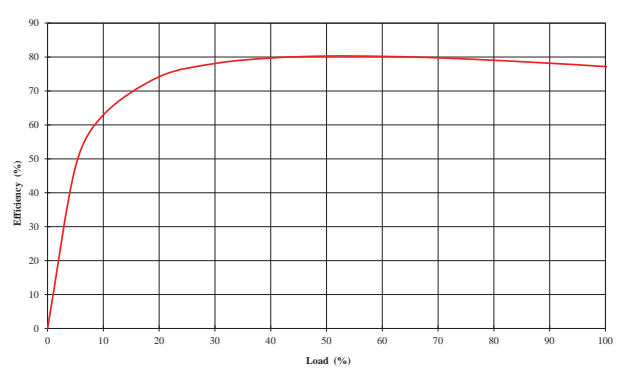

**NXJ1S1205(P)T(6)MC**


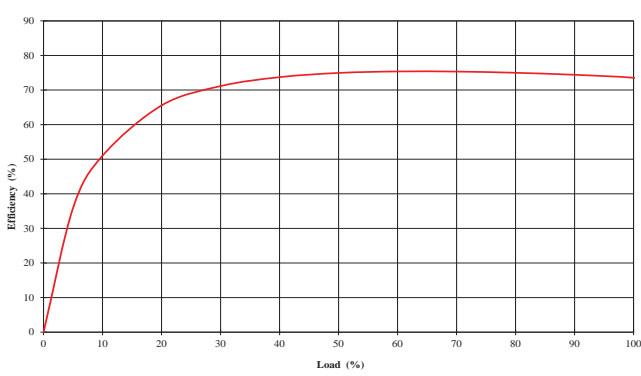


**NXJ1S1215(P)T(6)MC**

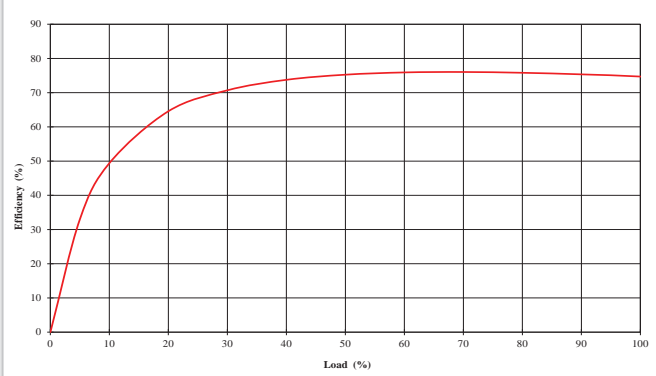

**TEMPERATURE DERATING**


The NXJ1T series has been designed to minimise the thermal impedance when mounted onto a customers application PCB by using multiple surface mount pads for each connection. All thermal measurements were carried out in still air using a test PCB designed in accordance with standard JESD51-9 (Test Boards for Area Array Surface Mount Package Thermal Measurements). A single layer and a 4 layer have been used and this demonstrates that a higher operating temperature can be achieved when the customers application PCB is designed to incorporate multiple layers and large copper planes. At an ambient temperature of 125°C, NXJ1Sxx05(P)T(6)MC variants require a 5% load, and NXJ1Sxx15(P)T(6)MC variants require a 5%-10% load

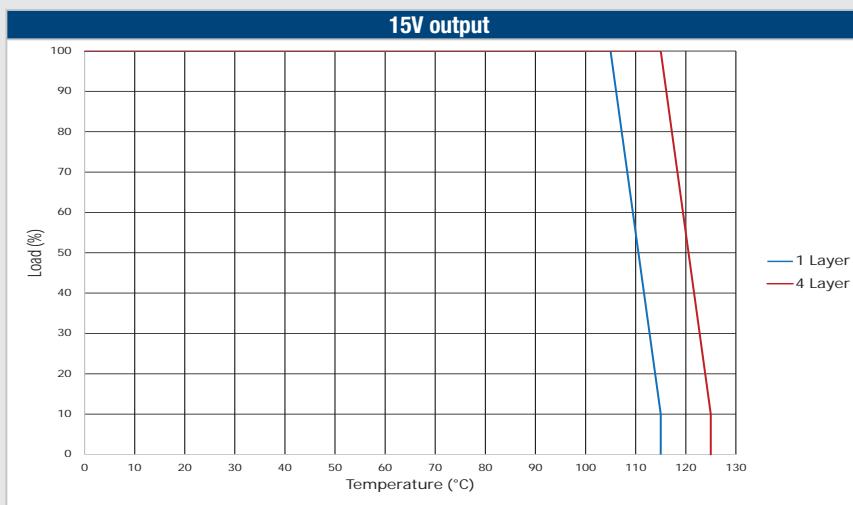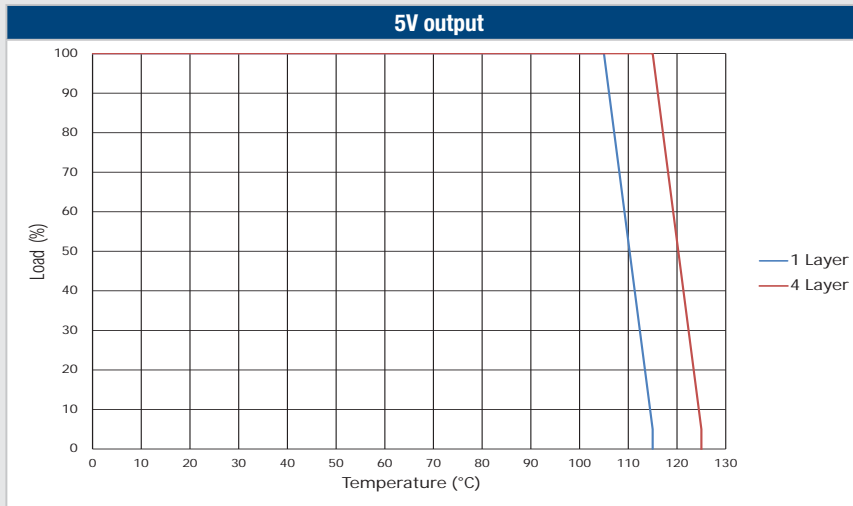

**EMC FILTERING AND SPECTRA**


**FILTERING**

An input capacitor and inductor is required to meet EN 55032 Curve B, Quasi-Peak EMC limit, as shown in the following plots. The following plots show positive and negative quasi peak and CISPR22 Average Limit B (green line) and Quasi Peak Limit B (pink line) adherence limits. Filter suitability should be evaluated in application.

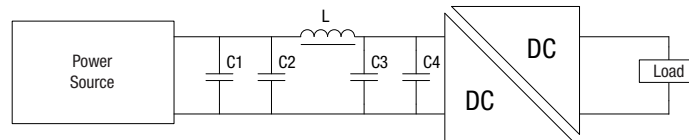


	Inductor			Capacitor		
	L, $\mu$ H	SMD	Through Hole	C1, $\mu$ F	C2 & C4, pF	C3, $\mu$ F
NXJ1S0505(P)T(6)MC	10	84103C	11R103C	47	22	10
NXJ1S0515(P)T(6)MC	Please contact Murata for more information					
NXJ1S1205(P)T(6)MC	100	84104C	11R104C	47	22	10
NXJ1S1215(P)T(6)MC	Please contact Murata for more information					


**NXJ1S0505(P)T(6)MC (Quasi-Peak)**

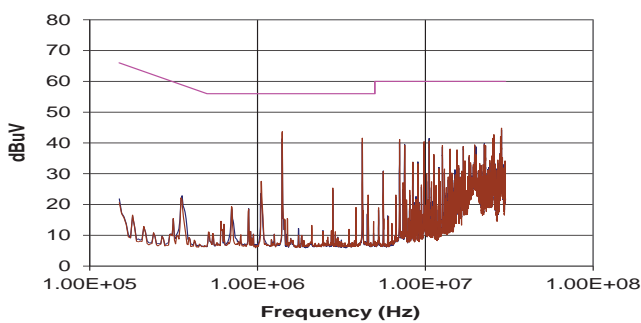


**NXJ1S0505(P)T(6)MC (Average)**

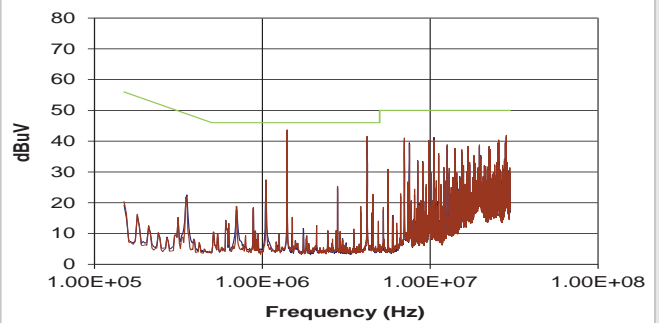

**NXJ1S1205(P)T(6)MC (Quasi-Peak)**


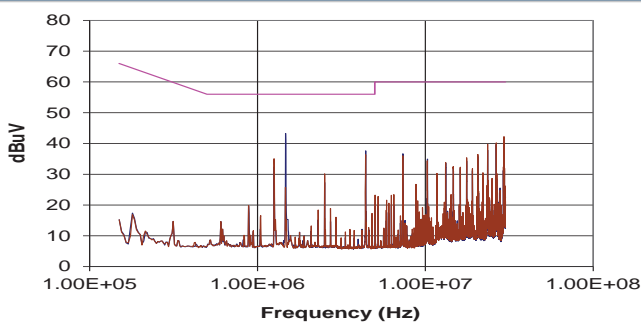


**NXJ1S1205(P)T(6)MC (Average)**

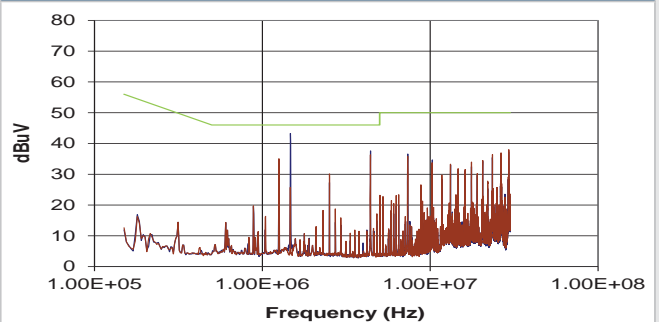

## PACKAGE SPECIFICATIONS

### Mechanical Dimensions - 5 Pin Variant

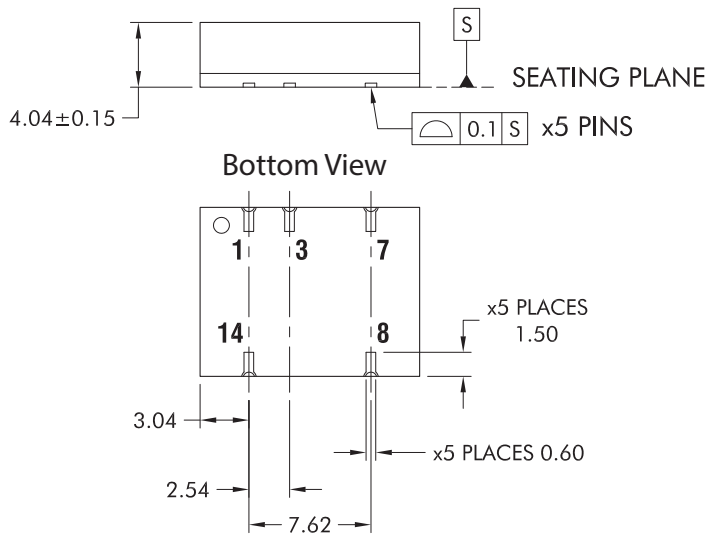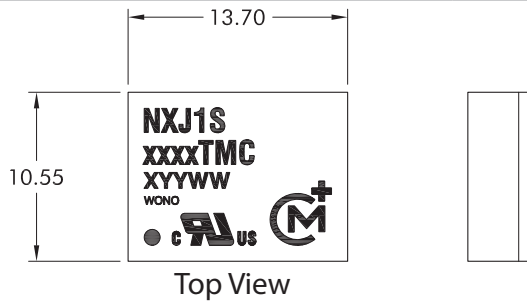

All dimensions in mm. Tolerances (unless otherwise stated) ±0.1.


Weight: 1.5g

### Pin Connections

Pin	Function
1	-Vin
3	+Vin
7	-Vout
8	+Vout
14	NC




NC - No connection.

### Recommended Footprint Details

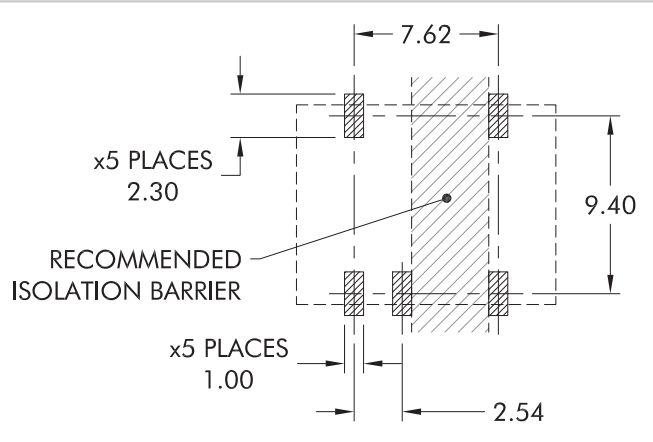

## PACKAGE SPECIFICATIONS

### Mechanical Dimensions - 6 Pin Variant

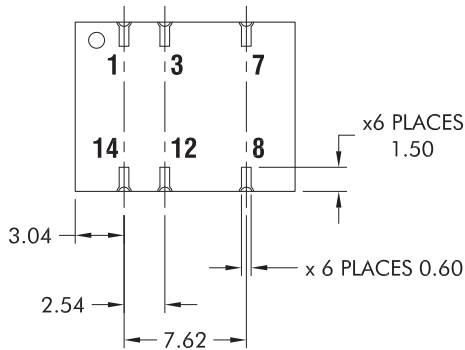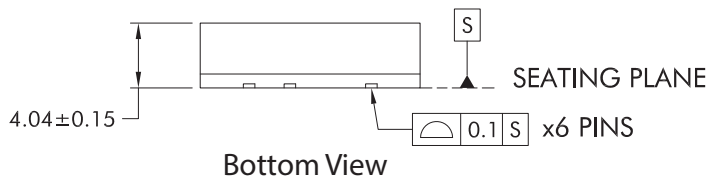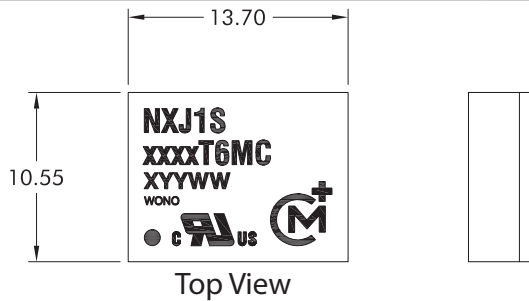

All dimensions in mm. Tolerances (unless otherwise stated) ±0.1.


Weight: 1.5g

### Pin Connections

Pin	Function
1	-Vin
3	+Vin
7	-Vout
8	+Vout
12	NC
14	NC


NC - No connection.

### Recommended Footprint Details

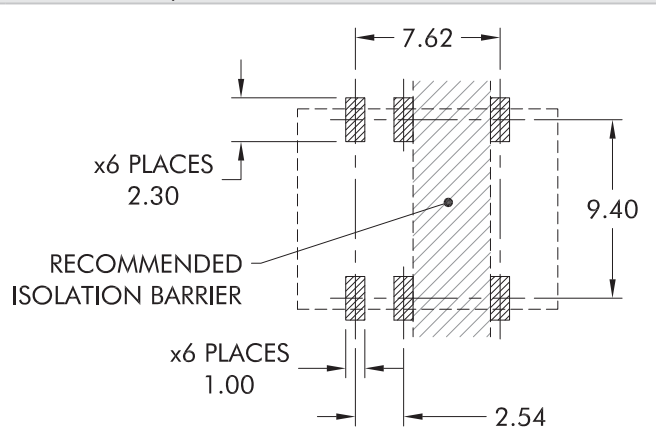


#### TAPE & REEL SPECIFICATIONS

##### REEL OUTLINE DIMENSIONS

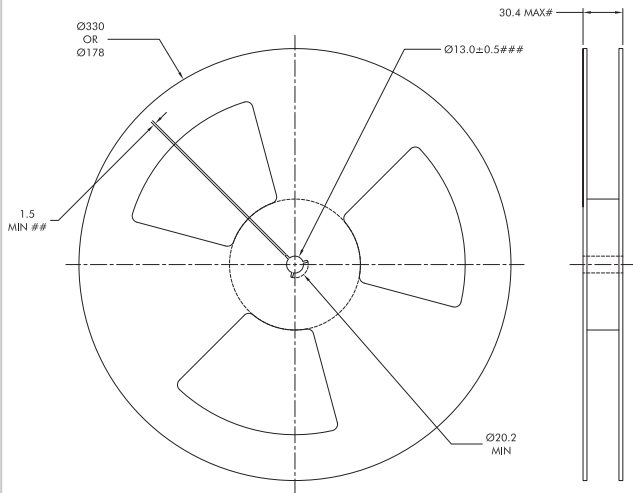


All dimensions in mm.  
 # Measured at hub  
 ## Six equi-spaced slots on 178mm reel  
 ### 13.5 ± 0.3mm on 178mm reel

##### REEL PACKAGING DETAILS

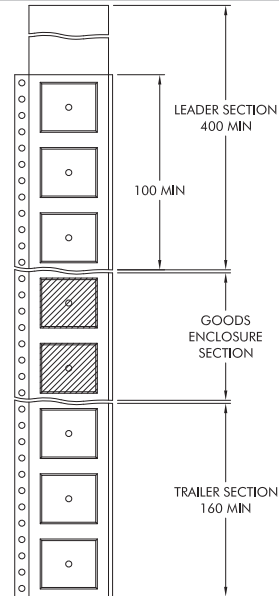

Reel Quantity: 7" - 230 or 13" - 930  
 Carrier tape pockets shown are illustrative only - Refer to carrier tape diagram for actual pocket details.

##### TAPE OUTLINE DIMENSIONS

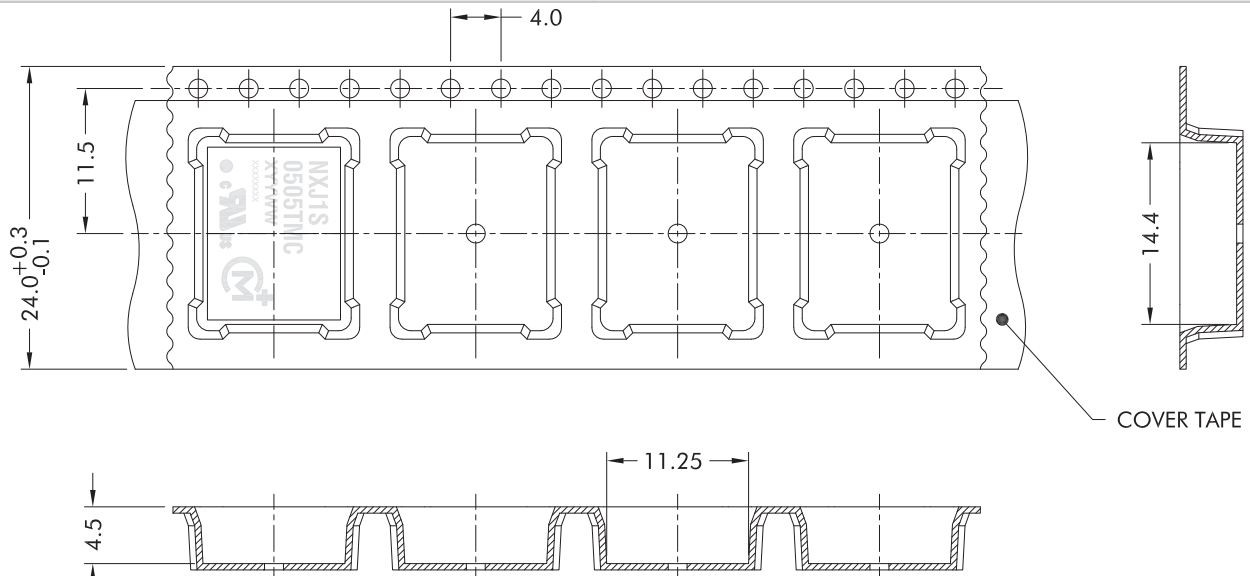

Carrier tape specification shall conform with current EIA-481 standard  
 Unless otherwise stated all dimensions in mm ± 0.1mm.  
 Components shall be orientated within the carrier tape as indicated

### DISCLAIMER

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment (automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.



This product is subject to the following [operating requirements](https://www.murata.com/en-eu/products/power/requirements) and the [Life and Safety Critical Application Sales Policy](https://www.murata.com/en-eu/products/power/requirements):

Refer to: <https://www.murata.com/en-eu/products/power/requirements>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2026 Murata Power Solutions (Milton Keynes) Ltd.