

# Extreme Broadband Silicon Capacitor XBSC 0201M 10nF BV11



Rev. 3.05

## General description

XBSC Capacitor targets Optical communication system such as ROSA/TOSA, SONET and all optoelectronics as well as High speed data system or products. The XBSC is suitable for DC blocking, feedback, coupling and bypassing applications in all broadband optoelectronics and High-speed data system. The unique technology of integrated passive device in silicon, developed by Murata Integrated Passive Solutions, offers unique performances with low insertion loss, low reflection and phase stability from 160 KHz to 160 GHz.

These capacitors in ultra-deep trenches in silicon have been developed in a semiconductor process, in order to integrate trench MOS capacitor providing high capacitance value of 10nF (for kHz–MHz range) and high frequency MIM capacitors for low capacitance value for GHz range), both in a SMT 0201M (0.6 x 0.3mm). The XBSC capacitor provides very high stability of the capacitance over temperature, voltage variation as well as a very high reliability. XBSC capacitors have an extended operating temperature ranging from -55 to 150°C, with very low capacitance change over temperature.

**Assembly:** Suitable for surface mounted application on rigid PCB, ceramic substrate, FR4 (laminare) or flex platforms.

**Bump finishing:** SAC305 type 6.

Copper pads optional for embedding version and ENIG for un-bumped version, as an optional finishing.

## Key features

- Extreme Broadband performance up to 160 GHz
- Resonance free
- Phase stability
- Insertion loss < 0.9dB Typ. up to 160 GHz.
- Ultra-high stability of capacitance value:
  - Temperature 70ppm/K (-55 °C to +150 °C)
  - Voltage <-0.1%/Volt
  - Negligible capacitance loss through ageing
- Low profile: 140 µm including bump height (SAC305 40 µm bumps after reflow)
- Break down voltage: 11V
- Low leakage current < 100pA
- High reliability
- High operating temperature (up to 150 °C)
- Compatible with high temperature cycling during manufacturing operations (exceeding 300 °C)
- Compatible with EIA 01005 footprint and with EIA 0201 outline

## Key applications

- ROSA/TOSA
- SONET
- High speed digital logic
- Microwave/millimetre system
- High volumetric efficiency (*i.e.* capacitance *per unit* volume)
- Broadband test equipment



**Functional diagram**

The next figure provides implementation set-up diagram.




Figure 1 Block Diagram

**Electrical performances**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
C	Capacitance value	@+25°C	-	10	-	nF
$\Delta C_P$	Capacitance tolerance <sup>(1)</sup>	@+25°C	-15	-	+15	%
T <sub>OP</sub>	Operating temperature		-55	20	150	°C
T <sub>STG</sub>	Storage temperature <sup>(2)</sup>		-70	-	165	°C
$\Delta C_T$	Capacitance temp. variation	-55 °C to 150 °C	-	70	-	ppm/K
V <sub>DC</sub>	Operating voltage <sup>(3)</sup>		-	-	3.8 <sup>(4)</sup> 3.4 <sup>(5)</sup>	V <sub>DC</sub>
BV	Break down voltage	@+25°C	11	-	-	V
$\Delta C_{RVDC}$	Capacitance voltage variation	From 0 V to RV <sub>DC</sub> , @+25°C	-	-	-0.1	%/V <sub>DC</sub>
IR	Insulation resistor	@RV <sub>DC</sub> , +25°C, 120s	-	10	-	GΩ
ESL	Equivalent Serial Inductance	@+25°C, SRF shunt mode	-	100	-	pH
ESR	Equivalent Serial Resistance	@+25°C, shunt mode	-	300	-	mΩ
F <sub>C-3dB</sub>	Cut-off frequency at 3dB	@+25°C	-	160	187	kHz
IL	Insertion loss	@ 20 GHz, +25°C	-	0.2	-	dB
		@ 40 GHz, +25°C	-	0.3	-	dB
		@ 60 GHz, +25°C	-	0.4	-	dB
		@ 100 GHz, +25°C	-	0.5	-	dB
		@ 160 GHz, +25°C	-	0.9	-	dB
RL	Return loss	Up to 160 GHz, +25°C	15	-	-	dB
ESD	HBM stress <sup>(6)</sup>	JS-001-2017	8	-	-	kV

Table 1 - Electrical performances

<sup>(1)</sup>: other tolerance available upon request.

<sup>(2)</sup>: without packaging.

<sup>(3)</sup>: Lifetime is voltage and temperature dependent, please refer to application note 'Lifetime of 3D capacitors'.

<sup>(4)</sup>: 10 years of intrinsic life time prediction at 100°C continuous operation.

<sup>(5)</sup>: 10 years of intrinsic life time prediction at 150°C continuous operation.

<sup>(6)</sup>: please refer to application note 'ESD Challenge in 3D Murata Integrated Passive technology'.



**Module S-parameters of 10nF XBSC in transmission mode**


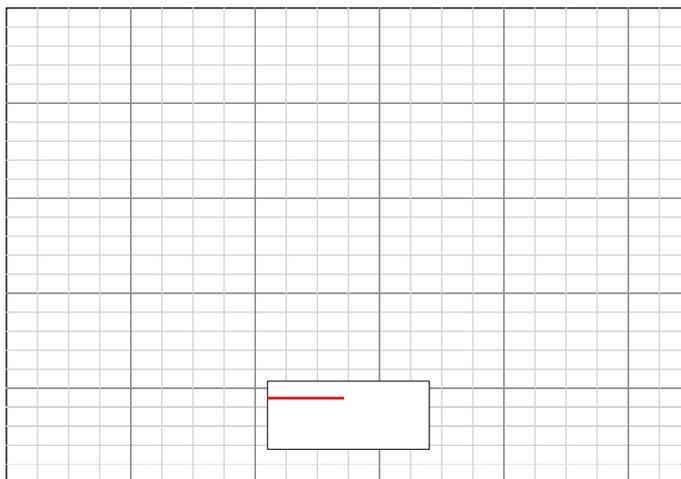


Figure 2 - 10nF XBSC measurement results (module of S-parameters)

**Schematic of 10nF XBSC in transmission mode**

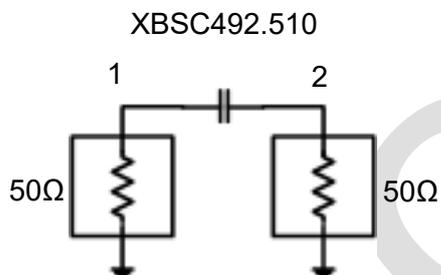

**10-mil thick Quartz substrate**  
 coplanar waveguide (CPW) - line width = 0.180mm and gap = 0.20mm (nominal)  
 50 Ohm characteristic impedance

Figure 3 - 10nF XBSC measurement schematic

**Example of surface mounted 0201M**

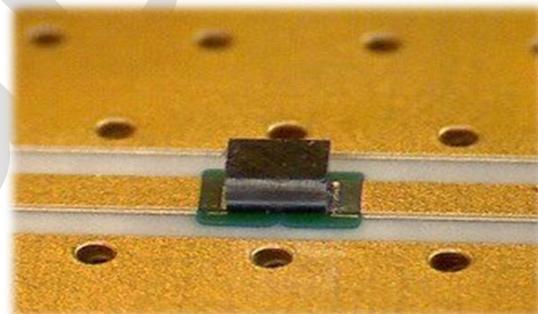


Figure 4 – micro picture of XBSC mounted on board in coplanar mode



FREE S-Parameters-Based Linear Simulation Models for ADS

<http://www.modelithics.com/mvpmurata.asp>



Pinning definition

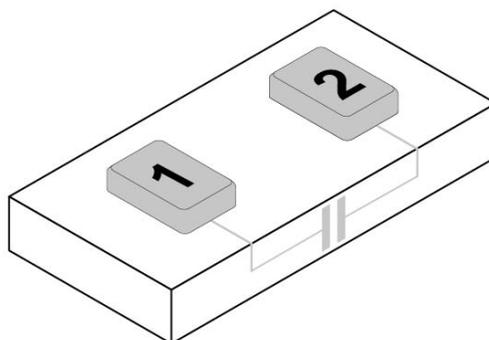


Figure 5 Pin configuration

pin #	Symbol	Coordinates X / Y
1	Signal	-150.0 / 0.0
2	Signal	150.0 / 0.0

Table 2 - Pining description. Reference (0,0) located at the centre of the die.

Ordering Information for XBSC492.510

Type number	Package		
	Packaging <sup>(1)</sup>	Finishing	Description
939118492510-T3S	7" T&R (1 000 pieces/reel) <sup>(3) (5)</sup>	SAC <sup>(1)</sup>	XBSC 0201M - 10nF – 2 pads – 0.6 x 0.3 mm x 0.10mm <sup>(4)</sup>
939118492510-T5S	7" T&R (5 000 pieces/reel) <sup>(3) (6)</sup>	SAC <sup>(2)</sup>	XBSC 0201M - 10nF – 2 pads – 0.6 x 0.3 mm x 0.10mm <sup>(4)</sup>
939118492510-T3N	7" T&R (1 000 pieces/reel) <sup>(3) (5)</sup>	ENIG <sup>(2)</sup>	XBSC 0201M - 10nF – 2 pads – 0.6 x 0.3 mm x 0.10mm <sup>(4)</sup>
939118492510-T5N	7" T&R (5 000 pieces/reel) <sup>(3) (6)</sup>	ENIG <sup>(2)</sup>	XBSC 0201M - 10nF – 2 pads – 0.6 x 0.3 mm x 0.10mm <sup>(4)</sup>

- (1) Other Film Frame Carrier are possible on request
- (2) SAC = ENIG (0.1µm Au / 5µm Ni) + SAC305 type 6 or ENIG 0.1µm Au / 5µm Ni
- (3) Missing capacitors can reach 0.5%
- (4) Refer to Figure 9
- (5) Dedicated for Pre-Production
- (6) For all demands including Mass Production

Table 3 - Packaging and ordering information

Product Name	Die Name	Description
XBSC492.510	XM0201510	XBSC 10nF/0201M/BV11 – 2 pads – 0.6 x 0.3 x 0.10 mm

Table 4 - Die information



**Pad Metallization**

This surface mounted Silicon Capacitor is delivered as standard with SAC305 type 6 bumping (Refer to Figure6).

Other Metallization, such as ENIG (0.1µm Au / 5µm Ni) (Refer to Figure7), Copper, Thick Gold or Aluminum pads are possible on request.

Silicon dies are not sensitive to humidity, please refer to applications notes ‘Assembly Notes’ section ‘Handling precautions and storage’.



Figure 6 – Top electrode description of SAC305 pre-bumped version

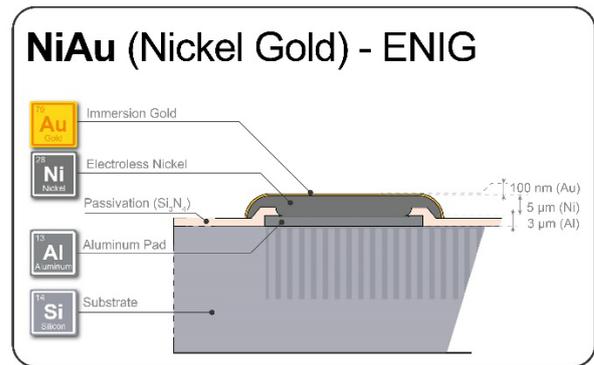


Figure 7 – Top electrode description of ENIG finishing version

**Material regulation**

This product is RoHS compliant at the time of publication. For further information about regulation compliancy, please ask your sales representative.

**Package outline**

The product is delivered as a bare silicon die.

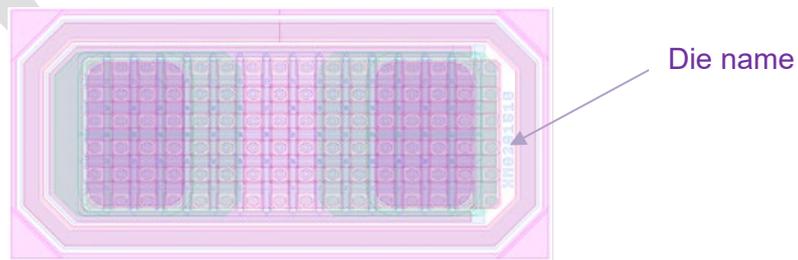


Figure 8 – Layout view



	L (mm)	W (mm)	T (mm)	c (mm)	p (mm)	e (mm)	t (mm)
Component dimension	0.60 ±0.02	0.30 ±0.02	0.11 max	0.10	0.20	0.15	0.04 <sup>(1)</sup> 0.05 <sup>(2)</sup> 0.005 <sup>(3)</sup>
Landing pad recommendation	/	/	/	0.114 min	0.186 max	0.164 min	/

- (1) Standard with solder joint height after reflow on board.
- (2) Standard with solder bump height before assembly
- (3) Only in case of ENIG finishing

Table 5 - Dimensions and tolerances

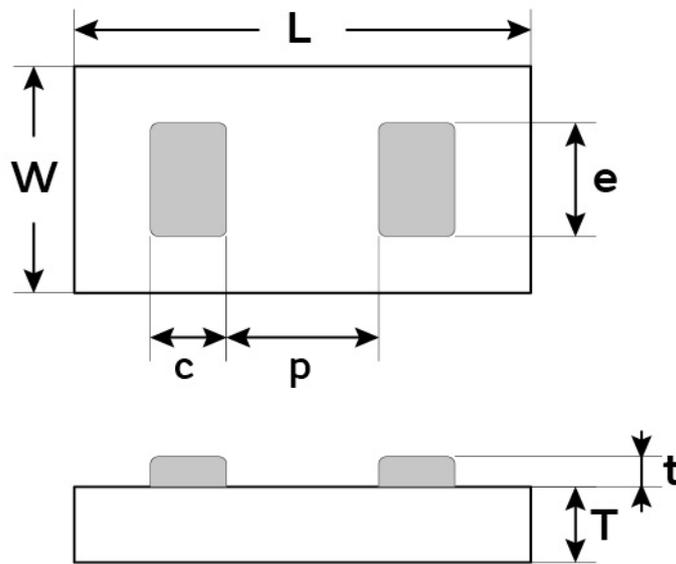


Figure 9 - Package outline drawing

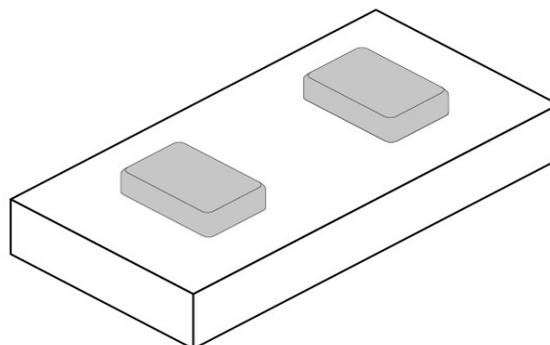


Figure 10 Isometric view



## Assembly

---

XBSC series is compatible with standard reflow technology.

It is recommended to design mirror pads on the PCB.

For further information, please see our mounting application note

The attachment techniques recommended by Murata on the customer's substrates are fully detailed in specific documents available on our website. To assure the correct use and proper functioning of Murata capacitors **please download the assembly instructions on <https://www.murata.com/en-us/products/capacitor/siliconcapacitors>** and read them carefully.



Figure 11 Scan this QR Code to access the Murata Silicon Capacitor web page

Product



**Packaging format**

Please refer to application note 'Products Storage Conditions and Shelf Life'.

**Tape and Reel:** Dies are flipped in the tape cavity (bump down) with die ID located near the driving holes of the tape.

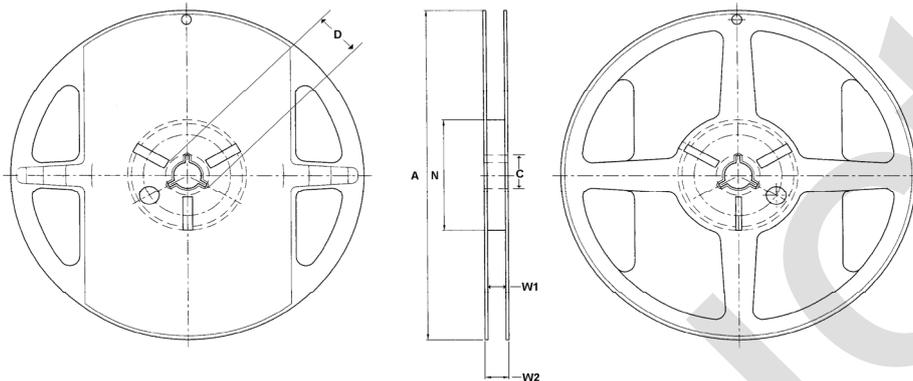


Figure 12 - Reel drawing

Tape Width	Diameter A	C	D	Hub N	W1	W2
8	178 (7 inches)	13.5	21	60	9.5	11.4

Table 6 - Reel dimensions (mm)

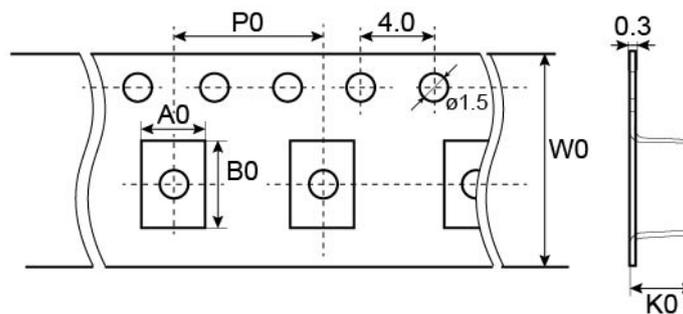


Figure 13 - Tape drawing

Cavity dimensions			Carrier tape width W0	Carrier tape pitch P0	Reel Capacity
Ao	Bo	Ko			
0.37 $\pm 0.04$	0.67 $\pm 0.04$	0.20 $\pm 0.04$	8.00	2.00	1000 or 5000

Table 7 - Tape dimensions (mm)



## Definitions

Data sheet status

**Objective specification:** This data sheet contains target or goal specifications for product development.

**Preliminary specification:** This data sheet contains preliminary data; supplementary data may be published later.

**Product specification:** This data sheet contains final product specifications.

Limiting values: Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those given in the Electrical performances sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information: Where application information is given, it is advisory and does not form part of the specification.

## Revision history

Revision	Date	Description	Author.
Release 1.0	2017 Nov 22nd	Objective specification	OGA
Release 1.05	2020 Sept 15 <sup>th</sup>	General update	OGA ; SCA
Release 1.06	2020 Sept 17 <sup>th</sup>	Update on packaging	OGA ; SCA
Release 3.00	2021 May 05 <sup>th</sup>	Product update	OGA, DDE, DY0, LLE. SCA; CGU
Release 3.01	2023 March 10 <sup>th</sup>	Packaging update	CGU; OGA
Release 3.02	2023 May 31st	Adding of finishings cross section	CGU; OGA ; SCA ; CCO
Release 3.03	2023 Oct 31th	Extended high frequency limit	DYE, OGA
Release 3.04	2025 Jan 15th	Complementary land pattern information	MOK+ DYE + OGA
Release 3.05	2025 Oct 21 <sup>st</sup>	Ordering information has been updated according to the latest product lineup and specification.	CGU, HFU

## Disclaimer / Life support applications

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Murata customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Murata for any damages resulting from such improper use or sale.

Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for

Murata Integrated Passive Solutions S.A. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.



[www.murata.com](http://www.murata.com)

[mis@murata.com](mailto:mis@murata.com)



---

any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

Product

---

Murata Integrated Passive Solutions S.A. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.



[www.murata.com](http://www.murata.com)

[mis@murata.com](mailto:mis@murata.com)